



heatwave 5.5

Tankless **Electric**, Point of Use

Cold to Hot in 3 seconds

Green Building Appliance

99% efficient

Hot water, endlessly

Small size fits under sink
(11" x 7" x 2.5")

ClearQ[®] Heating Chamber
easily inspect heating chamber

Hot water for one sink
in any climate


State-of-the-art safety features

Save thousands of gallons
of water per year

Hi/Lo Power Settings

5 year replacement warranty

ETL certified

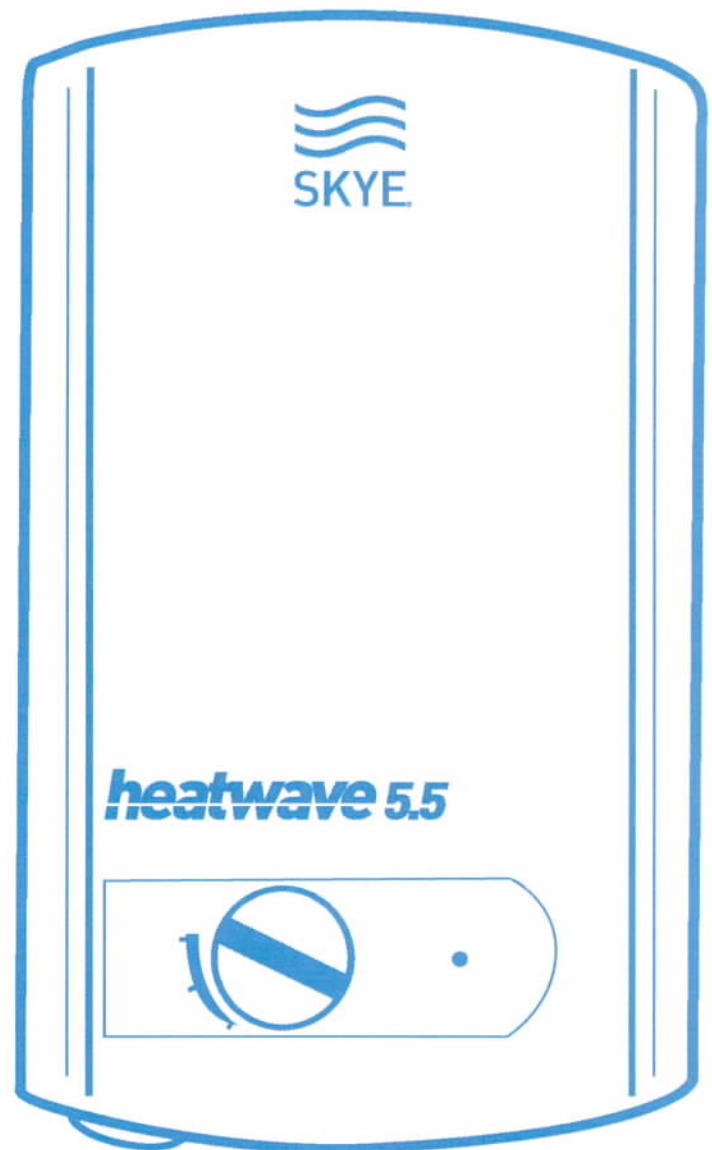

heatwave 5.5

SPECIFICATIONS

Maximum Current Load: 23 amps max at 240 VAC

KW Operational Range: 2.2 to 5.5 KW

Voltage: 240 VAC (suitable for 208 VAC at reduced output)

Cycles: 50-60 HZ

Efficiency: 99%

Recommended Breaker Size 2005 N.E.C.: 30 Amp

Minimum Wire Size*: #10 AWG Copper

Minimum activation flow rate: 0.5 GPM

Water Line/Outlet Size: 1/2" MNPT

Weight, Dry: 8 lbs.

Water Capacity: .4 Gallons

Height, Width, Depth: 11.0" x 7.0" x 2.5"

Housing: Plastic


Heating Chamber: Quartz

Elements: Six (6) thin film quartz elements

Safety Features: Hi-Limit Thermal Shutoff, Water & Electricity Linkage Switch, Residual Current Operated Protection

Temperature Settings: Hi/Lo Power
Temperature is controlled by flow

Standard Consumer Warranty: 5 years replacement warranty

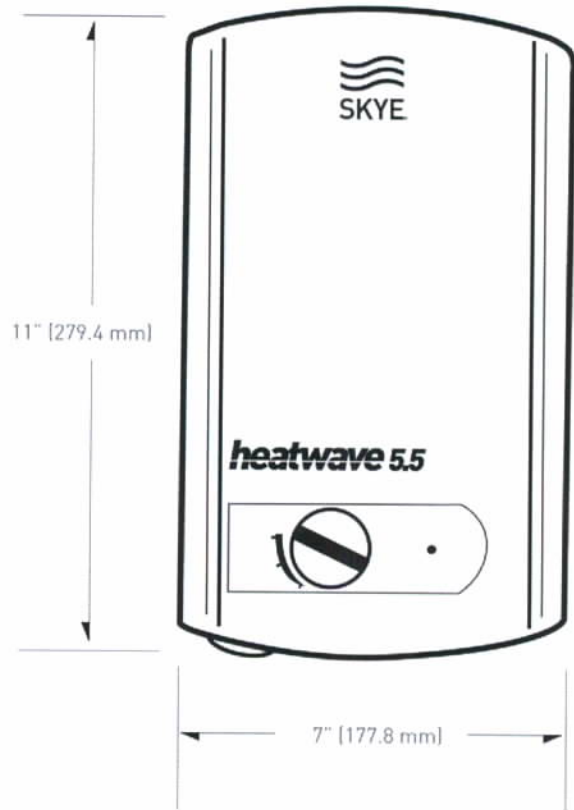

Flow rate at 77° F temperature rise 0.47 GPM

Flow rate at 40° F temperature rise 0.94 GPM

Gallons per hour at 77° F temperature rise,
29 Gallons Per Hour

Gallons per hour at 40° F temperature rise,
56 Gallons Per Hour



Better choices for everyday living.

SKYE International Inc.

7701 E. Gray Rd., Ste. 104

Scottsdale, AZ 85260

T 480 993 2300 F 480 951 6809

Heatwave is not suitable for outdoor installation
*check with local codes

